

LAMP


MonoFlat FAD-5

Manuel d'installation



Nous vous remercions pour l'achat de ce système d'ouverture latéral MonoFlat FAD-5 par SUGATSUNE.
Veuillez lire ce manuel avant de procéder à l'installation pour un résultat optimal et sécuritaire

ATTENTION


- Omettre de suivre ces instructions peut causer des dommages à la quincaillerie ou meubles environnant
- Utiliser des vis adéquates pour l'installation
- Assurez-vous de sélectionner le bon système en accord avec le poids et la dimension de votre porte
- Ne pas altérer ou modifier le système
- Température opérationnelle de 0° à 40° C
- Ce produit a été manufacturé avec le plus grand soin. Si malgré cela un défaut de fabrication venait qu'à se produire veuillez en aviser immédiatement votre distributeur.
- La période de garantie de ce produit est de une année après la date d'achat.
- La responsabilité de Sugatsune se limite au produit seulement et en aucun cas n'inclus l'installation ainsi que le mobilier.

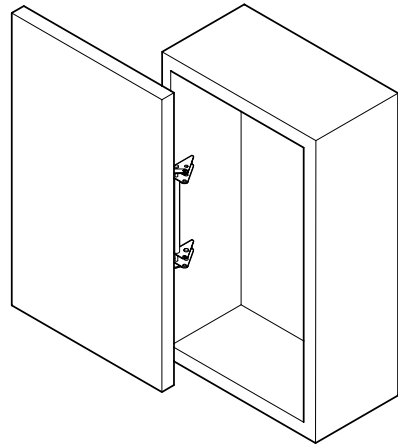**Spécification du produits**

Largeur de porte	270 ~ 350mm
Hauteur de porte	260 ~ 650mm
Épaisseur de la porte	15 ~ 20mm
Poids de la porte	Max 5kg(per door)

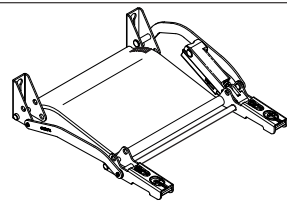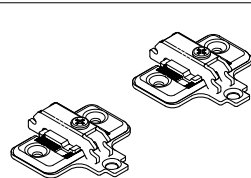Liste de pièce**① Système FAD-5 1 pcs****② Plaque de montage 2pcs**





Le diagram de montage, montre une porte gauche, la droite est symétrique.
Préparer la porte et le panneau adjacent tel que montré. Unité de mesure=mm

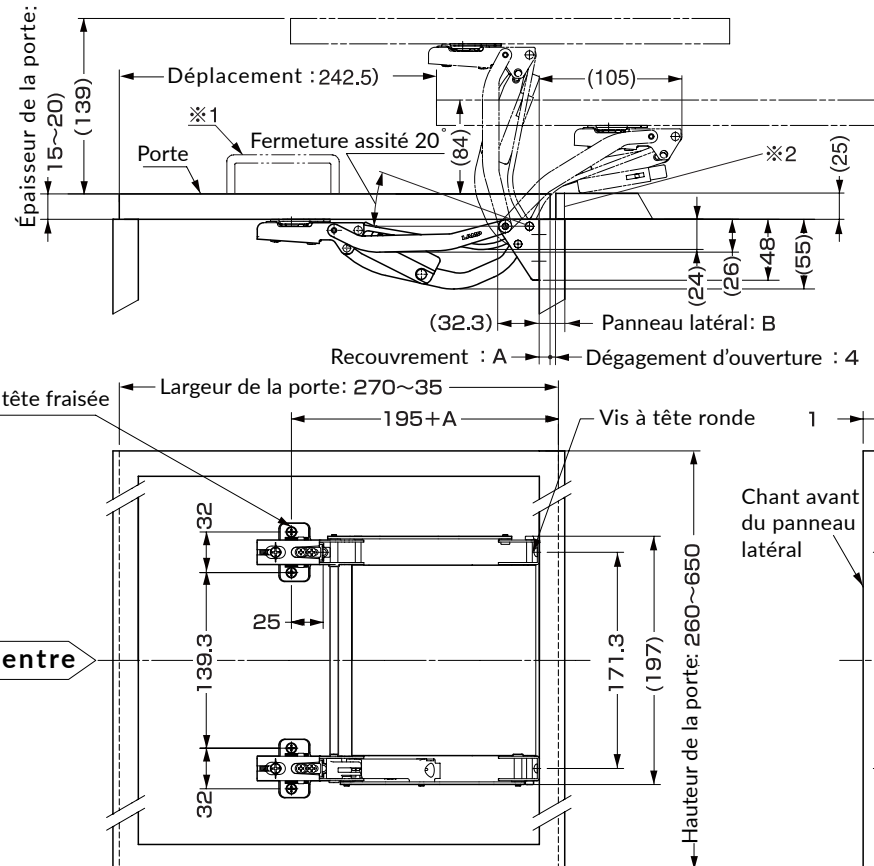**En prévision du reste de l'installation:**

1. Déterminer l'emplacement de la poignée sur la porte adjacente.
2. Attention les amortisseurs de porte ils ne doivent pas dépasser 3 mm d'épaisseur si la porte a 20 mm d'épais.

Panneau latéral:B (mm)	Recouvrement A				
	5	6	7	8	8.5~
15	21.5	-	-	-	-
16	22.5	21.5	-	-	-
17	23	22.5	-	-	-
18	23	22.5	-	-	-
19	23	-	-	-	-
20	23	-	-	-	-
21~	23	-	-	-	-
Épaisseur de la porte avec amortisseur					

Attention Ne pas utiliser de force excessive lors de la manipulation

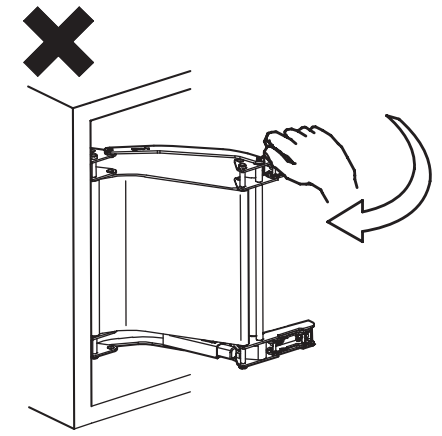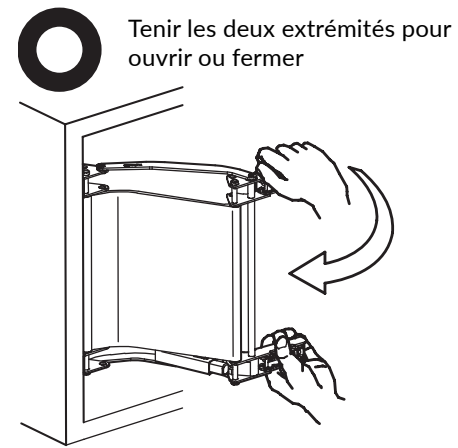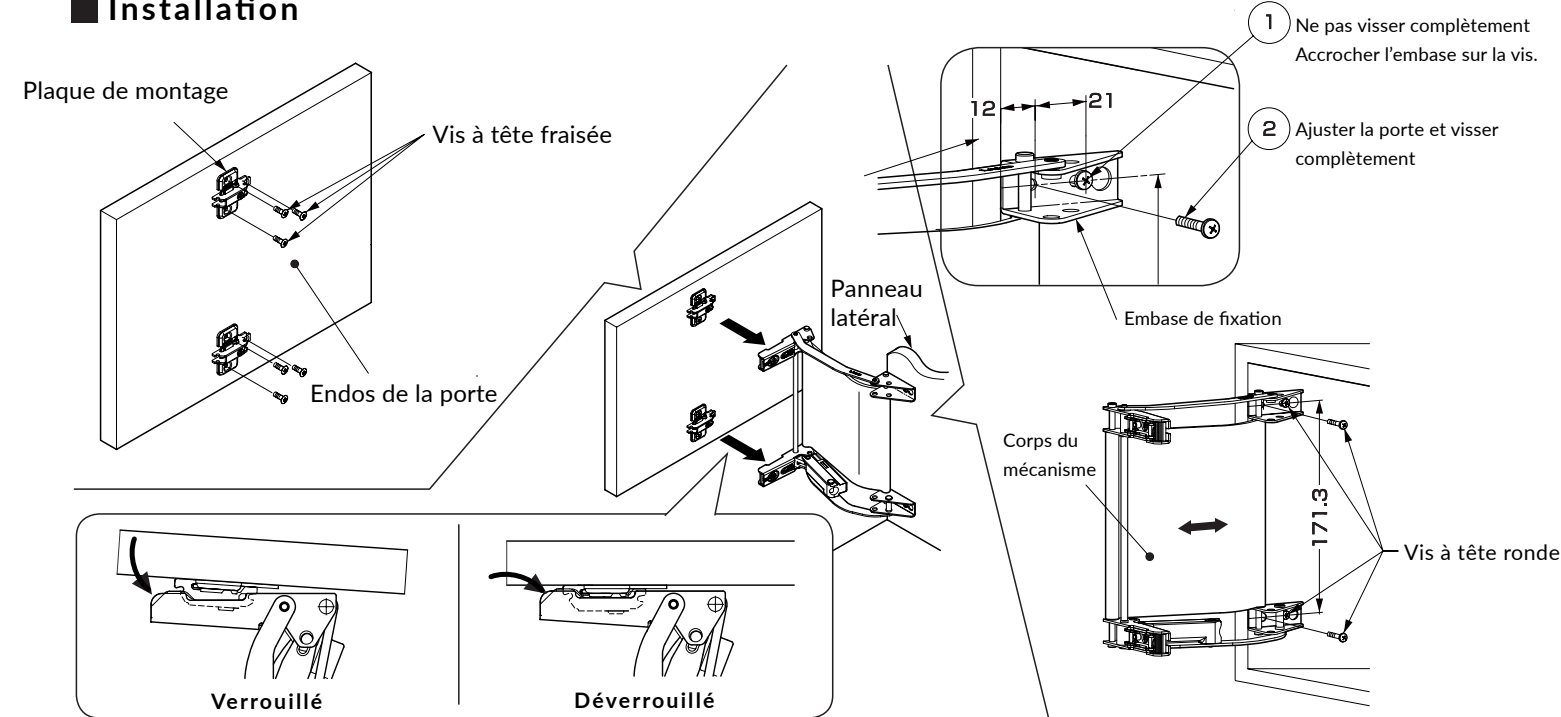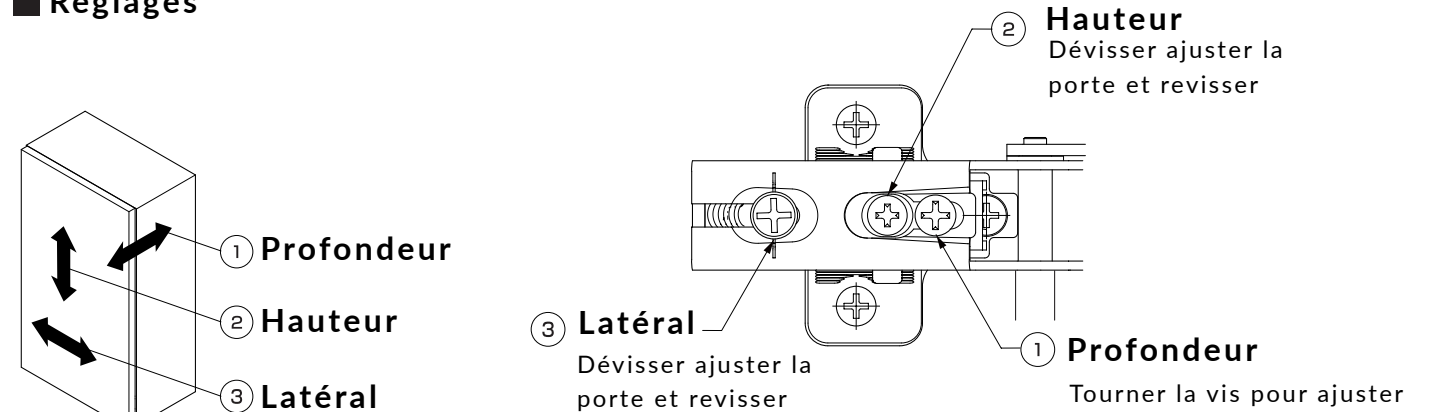**Installation****Réglages**

Assurez-vous que toutes les vis sont serrées
Enlever le film de protection (si applicable)

SUGATSUNE KOGYO CO.,LTD.
Phone: +81 (0)3 3866 2260
Fax: +81 (0)3 3866 4447
E-mail: export@sugatsune.co.jp
Website: www.sugatsune-intl.com

SUGATSUNE KOGYO (UK) LTD.
Phone: +44 (0)1491 680737
Fax: +44 (0)1491 680762
E-mail: sales@sugatsune.co.uk
Website: www.sugatsune.co.uk

SUGATSUNE AMERICA, INC.
Phone: +1 310 329 6373
Fax: +1 310 329 0819
E-mail: sales@sugatsune.com
Website: www.sugatsune.com

ROCHELEAU
ROCHELEAU.CA

ISO9001(Japan offices only)and ISO14001(Chiba production division and Logistic center only)certified.

LAMP
SUGATSUNE

LAMP


MonoFlat FAD™

MonoFlat FAD-5 Instruction Manual PAT.P

Thank you for purchasing this MonoFlat FAD-5 by SUGATSUNE. Before proceeding with the installation, please read this instruction manual carefully for the best possible result and ensure your safety.

WARNING

- Failure to observe the following precautions may result in injury and/or lead to damage to surrounding cabinets or fittings.
- Choose suitable screws to ensure of proper installation of the cabinet and door.
- Ensure that door size, weight and material correspond to the specifications stated in this manual.
- Do not disassemble or modify the system.
- Operation temperature range is 0°C~ 40°C .
- This product was manufactured and delivered with our utmost care. Should you however find any defect, please contact your dealer immediately.
- The Warranty period is one year after shipment date. Sugatsune's liability shall be limited to replacement of the product and will in no case extend to the assembly as a whole.

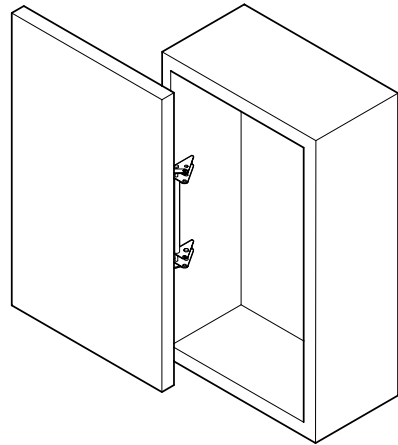


Product Specification


Door width	270 ~ 350mm
Door height	260 ~ 650mm
Door thickness	15 ~ 20mm
Door weight	Max 5kg(per door)

Parts List


① FAD-5 Body..... 1 pc.

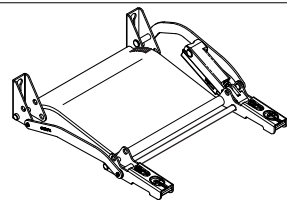

② Mounting Plate... 2 pcs.

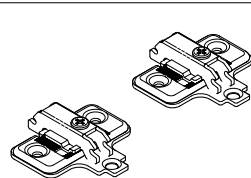

Overall (unit: mm) Picture shows the left hand door use. (Right hand door use is symmetrically reverse.) Prepare the door and sideboard as the following dimensions.


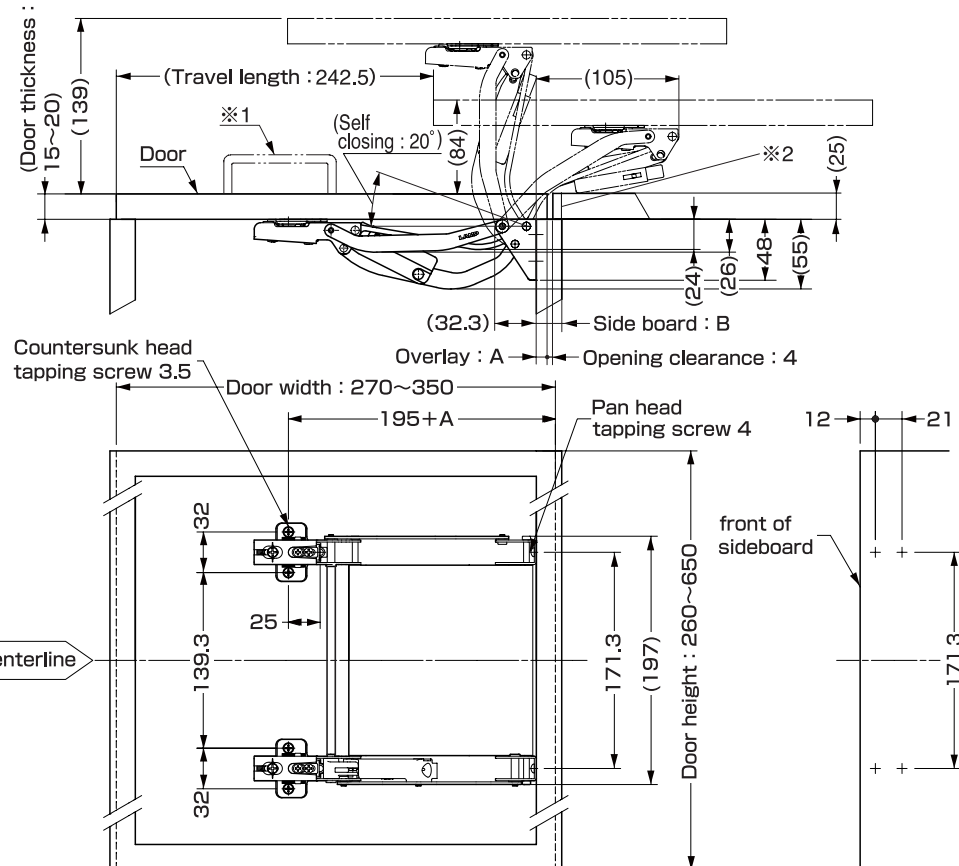


- ※ For the continuous doors installation,
1. Be careful for the handle position in the next door.
 2. Be careful for the thickness of cushion material.(Ex: If the door thickness is 20 mm, cushion must be less 3mm/thick.)


side board B (mm)	Overlay A(mm)				
	5	6	7	8	8.5~
15	21.5	-	-	-	-
16	22.5	21.5	-	-	-
17	23	22.5	-	-	-
18	23	22.5	-	-	-
19	23	-	-	-	-
20	23	-	-	-	-
21~	23	-	-	-	-
Total thickness of door and cushion(mm)					

WARNING


Do not use excessive force when operation the system.

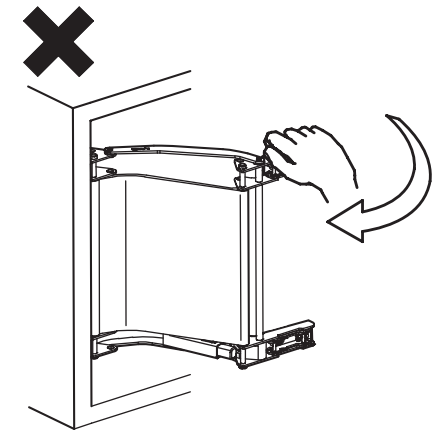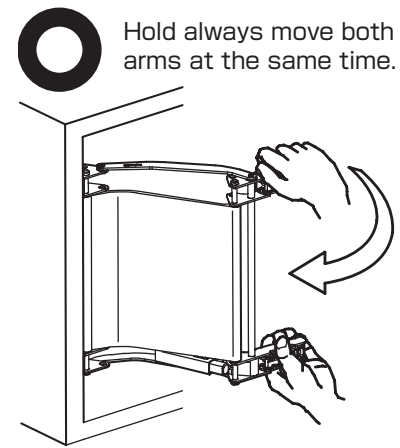

Installation

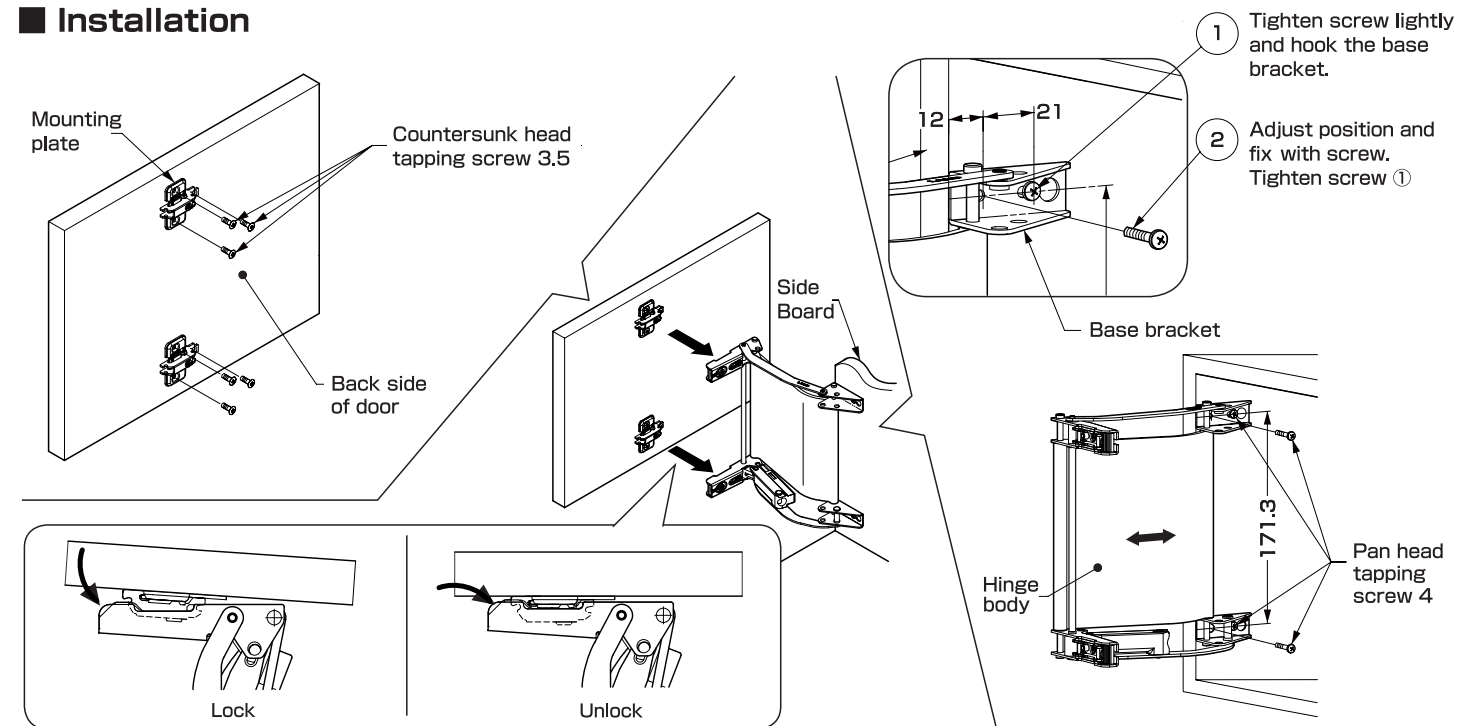

Adjustments

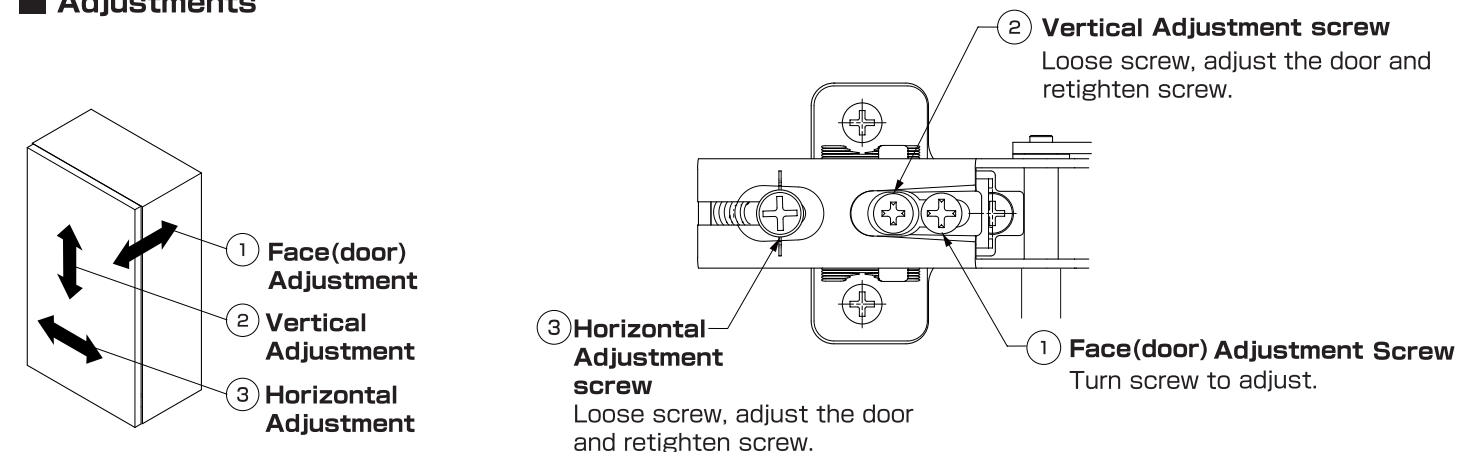

- Ensure that all the screws are securely tightened.
- Remove all the protection tape after assembly is finished.

SUGATSUNE KOGYO CO.,LTD.
 Phone: +81 (0)3 3866 2260
 Fax: +81 (0)3 3866 4447
 E-mail: export@sugatsune.co.jp
 Website: www.sugatsune-intl.com

SUGATSUNE KOGYO (UK) LTD.
 Phone: +44 (0)1491 680737
 Fax: +44 (0)1491 680762
 E-mail: sales@sugatsune.co.uk
 Website: www.sugatsune.co.uk

SUGATSUNE AMERICA, INC.
 Phone: +1 310 329 6373
 Fax: +1 310 329 0819
 E-mail: sales@sugatsune.com
 Website: www.sugatsune.com

SUGATSUNE SHANGHAI CO., LTD.
 Phone: +86 (0)21 3632 1858
 Fax: +86 (0)21 3632 1868
 E-mail: lamp@sugatsune.com.cn
 Website: www.sugatsune.com.cn

ISO9001(Japan offices only)and ISO14001(Chiba production division and Logistic center only)certified.

LAMP
SUGATSUNE